

LPS 10,000/13,500W Power Supplies



Features:

- Constant Current or Voltage
- 10,000 & 13,500 watt versions
- 200 to 240V/380 to 480V, 3Ø input
- Output voltage to 200V
- Output current to 250 amps

The LPS series power supplies are designed for various applications in semiconductor equipment along with OEM and industrial applications. Available for use in constant current or constant voltage applications. The LPS series is a compact reliable power source that can be customized to your requirements.





Specifications

Input Characteristics	
Input Voltage	200 to 240/380 to 440VAC $\pm 10\%$ 47 to 63 Hz.
Efficiency	> 90%
Power Factor	.90 @ 200V, .75 @ 440V
Inrush Current	10 amps max.
Leakage Current	1mA
Output Characteristics	
Output Voltage	5 to 200 volts
Output Current	250 amps (not to exceed wattage rating)
Ripple	0.5%
Line Regulation	0.5%
Load Regulation	0.5%
Temperature Drift	0.5% over temperature range after 30 minute warm-up
Overshoot	<1%
Power Limit	Limited to maximum power with power fold-back circuit
Rise/Fall Time	2 to 20ms, output voltage dependent
Protection	
OverTemperature	unit will shut down when heatsink temp exceed 75° C
Over Voltage	105% of rated voltage
Over Current	105% of rated current
Environmental	
Operating Temperature	0 to 40° C
Storage Temperature	-20 to 85°C
Humidity	0 to 90% non-condensing
Cooling	Forced Air



Interface (25 pin D-sub Female)

Pin Number	Function
1	ON/OFF. Default = High = ON
7	Current Monitor, 5V or 10V full Scale based on I Program Switch
10	5 V I Program / V Program (0 to 5V= 0 to full scale)
16	10V I Program / V Program (0 to 10V = 0 to full scale)
19	Voltage Monitor, 5V or 10V full Scale based on V Program Switch
2,4,6,20,23,24,25	GND
All other pins	N/C Do not use

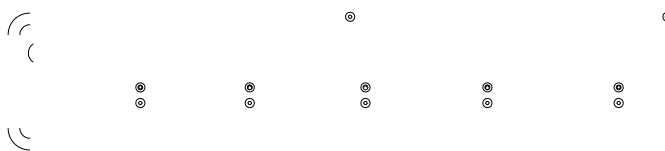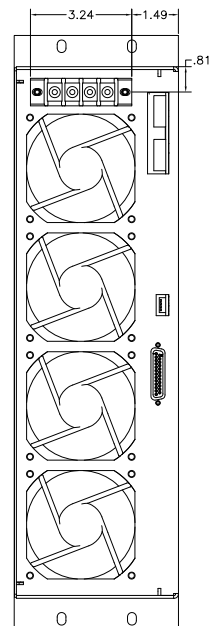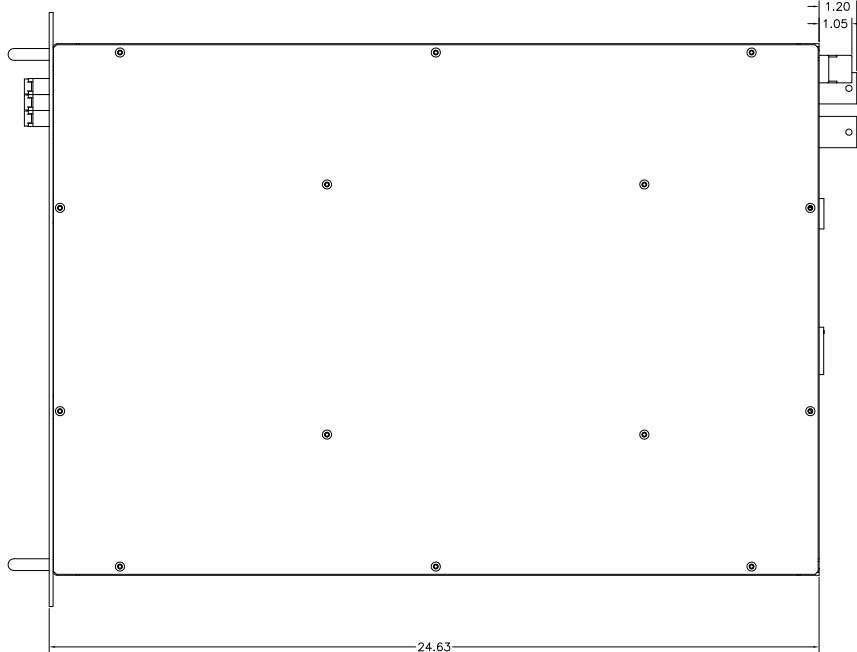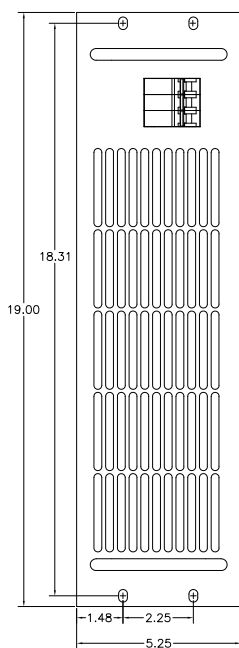

11001382: LPS-13500-XX-YY

26 Ward Hill Avenue, Bradford, MA 01835

Ph: 978-241-8260 / Fx: 978-241-8262

www.luminapower.com

sales@luminapower.com